

2 West Elevation
Scale: 1/2"=1'-0"

3 South Elevation
Scale: 1/2"=1'-0"

1 East Elevation
Scale: 1/2"=1'-0"

EXISTING ITEMS TO REMAIN:


- E1. BRICK VENEER - SCHOOL BUILDING
- E2. LIMESTONE BASE PANEL
- E3. LIMESTONE COURSE
- E4. CONCRETE SIREWALK
- E5. ALUMINUM WINDOW
- E6. LIMESTONE WATER TABLE SILL
- E7. DECORATIVE LIMESTONE FACADE
- E8. STORM DRAIN PIPE - ECU / CV

WORK NOTES:

- 1. REMOVE EXISTING LIMESTONE SILL/WATER TABLE FLUSH AND LEVEL ATTACH TO BRICK/CMU MASONRY AS DETAILLED IN DRAWING A40.
- 2. REMOVE EXISTING LIMESTONE BASE PANEL, GLASS AND SILL, LEAVE AS NEEDED TO ATTACH TO BRICK/CMU MASONRY AS DETAILLED IN DRAWING A40.
- 3. LIMESTONE BASE PANEL, CUT/SEAL TO FIT EXISTING CONDITIONS.
- 4. GLASS MAIN IN BETWEEN THE GLASS; BASE BID.
- 5. THIN MORTAR BETWEEN THE GLASS; ALTERNATE #2
- 6. CURVED FAWE GLASS (BASE BID)
- 7. OPERABLE PIVOTING SILL WITH SCREEN, PROVIDE MOTORIZED CONTROL WITH THERMOSTAT AND MANUAL OVERRIDE OPERATION, REFER TO SPECIFICATIONS.
- 8. RE-FINISHED METAL GUTTER - SLOPED TO DOWNSPOUTS
- 9. REPELLED CAP COVER (R-FLUSH BELOW)
- 10. METAL STEPPED WALL FLASHING
- 11. PRE-FINISHED METAL DOWNSPOUT, PROVIDE RECTANGULAR TO ROUND ADAPTER AND THE EXISTING STORM PIPE BELOW.
- 12. OPERATING AWNING WINDOW.
- 13. PRE-FINISHED METAL FLASHING, PROVIDE SURFACE MATCHED TO EXISTING STORM PIPE.
- 14. NOT USED
- 15. CONCRETE SIREWALK WHERE REMOVED FOR DOWNSPOUT TEEL, INSTALL FLASH TO EXISTING ADJACENT CONCRETE WALK, MATCH EXISTING FINISH/TYP. / ECU / CV.
- 16. HIDE CAP
- 17. 2" POLYURETHANE INSULATION WITH SEALANT
- 18. TRANSOM WINDOW - ALUM MULLION WITH AWNING WINDOW

GENERAL NOTES:

- G1. FIELD VERIFY ALL EXISTING CONCRETE AND DIMENSIONS, GREENHOUSE SKYLIGHT AND WINDOWS SHALL REPLICATE EXISTING SIZE AND SPACING AS CLOSE AS POSSIBLE. MULLION LOCATIONS ARE NOT NECESSARILY EQUAL OR SYMMETRICAL PLACED AT EACH WINDOW. EXISTING SKYLIGHT SHALL BE REPLICATED AS CLOSE AS POSSIBLE IN SPACING FROM SKYLIGHT TO SKYLIGHT. THE SCHOOL BUILDING FACE - CV.
- G2. ALL LIMESTONE PANELS, SILL, ETC. REDESIGNED TO BE CONCRETE OR BRICKEN CONTRACTOR SHALL TAKE RESPONSIBLE CARE AND CAUTION DURING REMOVALS TO ENSURE THE EXISTING LIMESTONE REMAINS IN PLACE. ANY CARELESS REMOVALS WILL BE REPAIRED AT CONTRACTOR'S RISK. CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONTRACTOR'S EXPENSE.
- G3. INTERIOR FOR VERTICAL MAINTENANCE TO ALIGN WITH THE EXISTING LAYOUT AS CLOSE AS POSSIBLE.
- G4. INTERIOR FOR GREENHOUSE FRAMING TO MATCH COLOR/SIMILAR TO PPG DRYBRAND COATING # 1 LOCATED ALUMINUM W/ST
- G5. ALL SEALS/MS USED AT GREENHOUSE FRAMING SHALL BE SIMILAR TO THERMOCLAD BRAND GLAZING SEALANT.

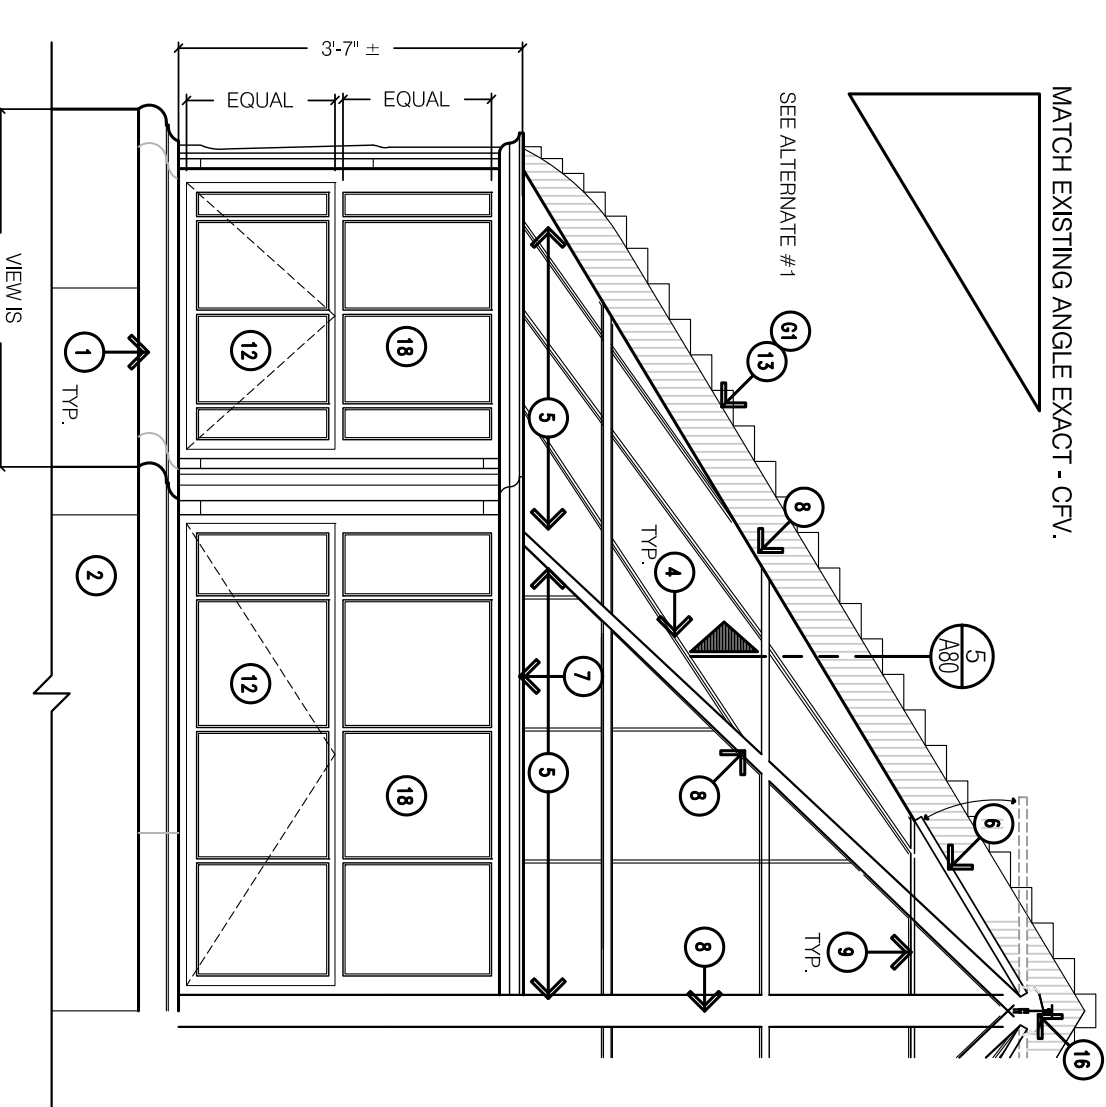

4 Partial South Elevation of Straight Façade (Alternate #1)
Scale: 1/2"=1'-0"