



Sidock Architects

ARCHITECTS • ENGINEERS • CONSULTANTS

'A Sidock Group Company'

Addendum Write Up

Addendum: 02

Project: 14049 Dexter Township, Michigan New Fire Sub-Station No 2

Issue Date: September 29, 2014

Addendum Reason: Response to Bidders questions.

Drawings Issued: Sketch No. SK-1 – Door Control Panel

Description: Response to Bidders questions.

Item	Description
1	Refer to Section 01 00 00 – General Requirements. Payment of Prevailing Wages is not a requirement for this project.
2	Refer to Section 08 36 13, para 2.3.D.4 – Sectional Overhead Doors – See attached Sketch No. SK-1 for custom control panel detail that was missing from Electrical Drawing Sheet E-211.
3	Refer to Section 08 36 13, para 2.3.E – Sectional Overhead Doors – Manufacturer's own monitored safety photo eyes may be used in lieu of system specified.
4	Refer to Section 10 99 90 – Miscellaneous Specialties – Add the following paragraph 2.10: 2.10 FLAGPOLE A. Furnish and install one (1) flagpole in the location shown on Drawings. Flagpole shall be manufactured by Concord Industries, Inc., American Flagpole Equipment Company, Poletech Co., Inc. or approved equal. Flagpole shall be ground set, continuous or cone tapered seamless aluminum flagpole 35' high above the ground, having minimum diameters of 6" at butt, 3-1/2" at top, and minimum wall thickness of .188". Provide a 6" diameter aluminum ball at top, revolving aluminum truck with double sheaves, two aluminum cleats, two (2) sets of 5/16"

Novi • Muskegon • Wyandotte • Lansing • Gaylord • Chicago
45650 Grand River Avenue, Novi, Michigan 48374
Phone (248) 349-4500 • Fax (248) 349-1429
www.sidockarchitects.com

No. 10 nylon braided rope halyards having bronze center and two (2) chrome swivel snaps for flags. Provide standard aluminum base at bottom of poles. Finish all exposed aluminum surfaces with a fine satin aluminum finish.

- B. Furnish metal foundation tubes and copper ground rods to Concrete Trade for setting. Set the poles in the foundation tubes, center with fixed metal wedges at bottom and align plumb with loose metal wedges at top. Fill the space between the pole and the tube with sand, packed in place, fill the top portion with waterproof cement mortar, and seal with caulking compound.

The Bidder shall acknowledge receipt of this Addendum in the Bid Form. Information contained in this Addendum overrides the corresponding information in the Bid Package.

End of Addendum 02


18" PANEL FACE

16" RECESSED CABINET

2-POSITION GREEN ILLUMINATED SELECTOR SWITCH - EQUAL TO SCHNEIDER ELECTRIC MODEL #ZB4BK1233 (ILLUMINATED IN HOLD OPEN POSITION) (TYPICAL FOR 6)

FLUSH MOUNTED 'OPEN-CLOSE-STOP' DOOR OPERATOR SWITCH (TYPICAL FOR 6)

5" DEEP, SHOP PRIME PAINTED, FLUSH MOUNTED STEEL CABINET WITH PIANO HINGED 304 STAINLESS STEEL PANEL FACE

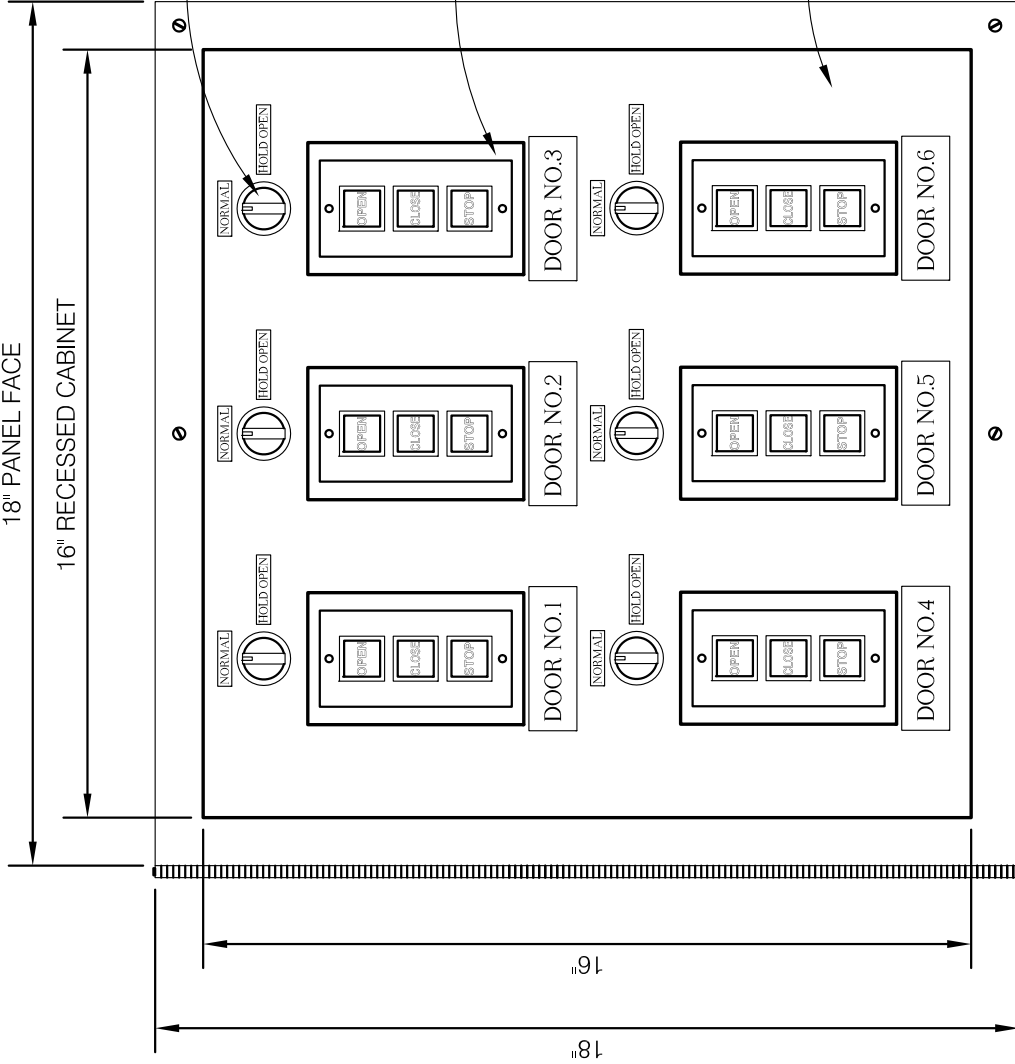

WATCH ROOM O.H. DOOR CONTROL PANEL

SCALE: 3" = 1'-0" PROVIDE BLACK LAMINATED PHENOLIC PLASTIC SWITCH TAGS w/ WHITE LETTERING (TYPICAL)

SG Sidock Architects
ARCHITECTS • ENGINEERS • CONSULTANTS
 4850 GRAND RIVER AVE. • NOVI, MICHIGAN 48374 • (248) 349-4500

Last Drawn 9/29/14	By KWG	File Name SK-1	Job Number 14049	Sheet SK-1
-----------------------	-----------	-------------------	---------------------	---------------

NEW FIRE SUBSTATION No.2
DEXTER TOWNSHIP, MICHIGAN
ADDENDUM #2