WAKELY ASSOCIATES, INC.
ARCHITECTS
30500 Van Dyke Avenue Suite M7
Warren, Michigan 48093

September 27, 2017

ADDENDUM NO. ONE to the plans and specifications for the FARMINGTON PUBLIC SCHOOLS, 2017 RENOVATIONS, NORTH FARMINGTON HIGH SCHOOL RENOVATIONS, Farmington, MI, Architect's Project No. 161664D, dated September 11, 2017.

The above plans and specifications are modified, supplemented or augmented as follows, and this ADDENDUM NO. ONE, is hereby made a part of the contract documents.

Drawings A7.1FN, A7.2FN, A8.3FN, and TL103 are being issued with this Addendum.

ARCHITECTURAL DRAWING ITEMS:

ITEM NO. A1: Refer to Drawing No. A7.1FN (Re-issued):
a. Replace the previously issued sheet A7.1FN with this sheet.

ITEM NO. A2: Refer to Drawing No. A7.2FN (Re-issued):
a. Replace the previously issued sheet A7.2FN with this sheet.

ITEM NO. A3: Refer to Drawing No. A8.3FN (Re-issued):
a. Revised the Composite First Floor Tile Plan 1/A8.3FN.

AVL DRAWING ITEMS:

ITEM NO. AV1: Refer to Drawing No. TL103 (re-issued).

a. Theatrical Lighting Junction Box Schedule updated. See sheet.

END OF ADDENDUM NO. 1

Cc: Aaron Phillips, McCarthy &Smith

NOTES: (APPLIES TO ALL DOORS)

A. VERIFY ALL DOOR OPENINGS AND MASONRY FRAME OPENINGS IN FIELD PRIOR TO FABRICATION OF NEW.
B. ALL NEW FRP DOORS AND ALUMINUM FRAMES TO RECEIVE MANUFACTURER FINISH,REFER TO SPECIFICATIONS FOR HARDWARE SETS.
C. ALL NEW WOOD DOORS CALLING FOR STAIN TO BE FACTORY STAINED AND SEALED ON ALL SURFACES AND SIDES AND ENDS. DO NOT LEAVE RAW WOOD ON ENDS EXPOSED.

REMARKS: (NOTE: NOT ALL REMARKS LISTED ARE USED)

1. EXISTING WOOD DOOR AND H.M. FRAME TO REMAIN - PREP DOOR AS NEEDED TO ACCEPT NEW HARDWARE
2. REMOVE & REPLACE EXIST DOOR AND FRAME - SEE SCHEDULE
3. PROVIDE ADA AUTOMATIC OPENER @ 1 LEAF
4. PROVIDE KEYED REMOVABLE MULLION ON CENTER MULLION
5. VERIFY MASONRY OPENING IN FIELD PRIOR TO FABRICATION OF NEW DOOR & FRAME.
6. PROVIDE ¼" LAM. GLASS IN ALL DOOR AND FRAME OPENINGS.
7. PROVIDE 1" LAM. INSULATED GLASS IN DOOR AND FRAME OPENINGS
8. PROVIDE FIRE RATED GLASS IN DOOR AND FRAME OPENINGS. SEE SPEC.
9. DISCONNECT ALARM SYSTEM TO REPLACE DOOR/ FRAME AND RECONNECT AS REQUIRED WHEN NEW DOOR/ FRAME IS IN PLACE.
10. DOORS AND FRAME TO REMAIN. CHANGE HARDWARE AS SPEC'D. MODIFY DOORS & FRAMES AS REQ'D FOR NEW HARDWARE REQUIREMENTS.
11. PROVIDE 20 MIN RATED GLASS IN DOOR AND 45 MIN RATED GLASS IN FRAME / TRANSOM PANEL.
12. REMOVE EXIST. DOOR AND HARDWARE AND REPLACE WITH NEW DOOR AND HARDWARE. VERIFY FRAME OPENING/DOOR SIZE IN FIELD PRIOR TO ORDERING NEW DOOR. FRAME TO BE PAINTED.
13. NEW DOOR AND FRAME.
14. SEE ELEVATIONS FOR FRAME TYPE.
15. REMOVE / REPLACE MARBLE THRESHOLD WITH NEW.
16. PROVIDE SOUND SEALS ON ALL SIDES OF NEW WOOD DOOR.
17. PROVIDE NEW ALUM. INSERT FRAME WITH CLEAR ANODIZED FINISH TO FIT INSIDE EXISTING FRAMED DOOR OPENING. REMOVE STOPS, REWORK FRAME AS REQ'D TO REVERSE SWING.
18. DEMOLITION BY OTHERS
19. FIRE RATED ROLL DOWN SHUTTER. (SEE SPEC.)
20. PROVIDE NEW LOCKING HARDWARE TO CREATE SECURE ENTRY-
21. PRP NEW FRAME FOR STRIKE RELEASE HARDWARE.
22. PROVIDE 1" LAMINATE GLASS IN ALL DOOR OPENINGS.
23. ALTERNATE BID #2.
24. OVERHEAD DOOR SEE SPEC.
25. EXISTING ELEVATOR DOOR

ABBREVIATIONS

AL	ALUMINUM	PTD	PAINTED
ETR	EXISTING TO REMAIN	WD	WOOD
FRP	FIBERGLASS REINFORCED POLYESTER	STL	STEEL
HM	HOLLOW METAL	STN	STAINED
MAR	SYNTHETIC MARBLE THRESHOLD	TG	TEMPERED GLASS
PFN	PRE FINISHED BY MANUFACTURER	GL	GLASS

FRAME ELEVATIONS:

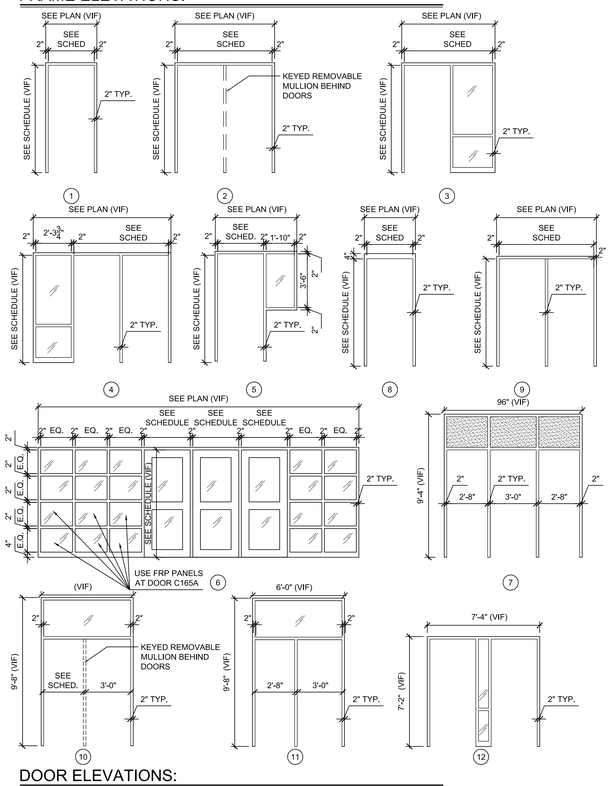

DOOR ELEVATIONS:

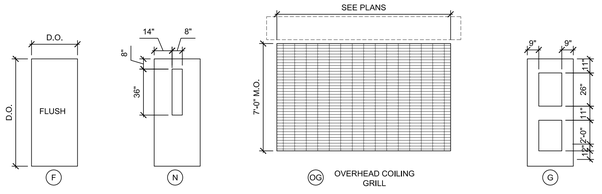

DOOR SCHEDULE

DOOR OPENING			DOOR			FRAME			DETAILS			THRESHOLD	U.L. LABEL	HARDWARE SET	REMARKS
NO.	WIDTH	HEIGHT	TYPE	MATERIAL	FINISH	TYPE	MATERIAL	FINISH	HEAD	JAMB	SILL				
FIRST FLOOR															
H101B	3'-0"	7'-0"	H	WD	STN	1	HM	PTD	-	-	-	-	-	-	6,13
H103A	3'-0"	7'-0"	H	WD	STN	5	HM	PTD	-	-	-	-	-	-	6,13
H104A	3'-6"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5
H105A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	-	-	6,13
H105B	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	-	-	6,13
H106A	3'-6"	7'-0"	H	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	13,8
H107A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	-	-	13
H108A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	-	-	13
H109A	3'-0"	7'-0"	H	FRP	PFN	1	AL	PFN	-	-	-	-	-	-	13,2,5,7
H115A	2@3'-0"	7'-0"	N	FRP	PFN	1	HM	PTD	-	-	-	-	20MIN	-	13,16,8,2,5
H115B	2@3'-0"	7'-0"	N	FRP	PFN	1	HM	PTD	-	-	-	-	20MIN	-	13,16,8,2,5
H115C	2@3'-0"	7'-0"	H	FRP	PFN	2	HM	PTD	-	-	-	-	-	-	13,16,7,2,5,4
H117A	2@3'-0"	7'-0"	N	FRP	PFN	1	HM	PTD	-	-	-	-	20MIN	-	13,16,8,2,5
H122A	2@3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	60MIN	-	13,2
H132A	2@3'-0"	7'-0"	N	FRP	PFN	1	HM	PTD	-	-	-	-	20MIN	-	13,16,8,2,5
H133A	2@3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	-	-	-	12,16
H134A	2@3'-0"	7'-0"	F	WD	STN	2	HM	PTD	-	-	-	-	20MIN	-	13,16
H134B	2@3'-0"	7'-0"	F	WD	STN	2	HM	PTD	-	-	-	-	20MIN	-	13,16
H134C	2@3'-0"	7'-0"	F	WD	STN	2	HM	PTD	-	-	-	-	20MIN	-	13,16
H134D	2@3'-0"	7'-0"	F	WD	STN	2	HM	PTD	-	-	-	-	-	-	13,16,18
									-	-	-	-	-	-	
H134E	2@3'-0"	7'-0"	F	WD	STN	2	HM	PTD							13,16,18
H135A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	-	-	-	12
H136A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	MAR	20MIN	-	12,15
H137A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	MAR	20MIN	-	12,15
H138A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	-	45MIN	-	12
H140A	3'-0"	7'-0"	F	FRP	PFN	3	AL	PFN	-	-	-	AL	-	-	7,13,5
H141A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	-	20MIN	-	12,18
H141B	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	13,5
H141C	2'-0"	4'-0"	-	-	-	-	-	-	-	-	-	-	60MIN	-	19
H141D	2'-0"	4'-0"	-	-	-	-	-	-	-	-	-	-	60MIN	-	19
H142A	3'-0"	7'-0"	H	FRP	PFN	2	HM	PTD	-	-	-	-	20MIN	-	8,13,5,2
H145A	3'-0"	3'-0"	F	WD	STN	-	-	-	-	-	-	-	60MIN	-	13,14
H146A	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	60MIN	-	13,5
H146B	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	60MIN	-	13
H146C	3'-0"	7'-0"	F	FRP	PFN	1	AL	PFN	-	-	-	AL	-	-	13
H146D	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	60MIN	-	13
H146E	3'-0"	7'-0"	F	WD	STN	-	ETR	PTD	-	-	-	-	60MIN	-	12
H150A	2@3'-0"	6'-8"	G	AL	PFN	2	AL	PFN	-	-	-	AL	-	-	7,13,2,5
H152A	2@3'-0"	7'-0"	G	AL	PFN	2	AL	PFN	-	-	-	-	-	-	13,2,5,6
H152B	2@3'-0"	7'-0"	G	AL	PFN	9	AL	PFN	-	-	-	-	-	-	13,2,5,6
H152C	2@3'-0"	7'-0"	G	AL	PFN	9	AL	PFN	-	-	-	-	-	-	13,2,5,6
H152D	2@3'-0"	7'-0"	G	AL	PFN	9	AL	PFN	-	-	-	-	-	-	13,2,5,6
H152E	2@3'-0"	7'-0"	G	AL	PFN	2	AL	PFN				AL			7,13,2
H152F	2@3'-0"	7'-0"	G	AL	PFN	9	AL	PFN	-	-	-	AL	-	-	7,13,2,5
H152G	2@3'-0"	7'-0"	G	AL	PFN	9	AL	PFN	-	-	-	AL	-	-	7,13,2,5
H152H	2@3'-0"	7'-0"	G	AL	PFN	9	AL	PFN	-	-	-	AL	-	-	7,13,2,5
H153A	1@3'0",1@2'8"	7'-0"	G	AL	PFN	10	AL	PFN	-	-	-	AL	-	-	7,13,2,5
H153B	1@3'0",1@2'8"	7'-0"	G	AL	PFN	11	AL	PFN				AL			7,13,2,5
H154A	2@3'-0"	7'-0"	H	WD	STN	2	HM	PTD	-	-	-	-	-	-	7,13,2,5
H155A	1@3'0",2@2'8"	7'-0"	G	AL	PFN	7	AL	PFN	-	-	-	AL	-	-	7,13,2,5
H155B	2@3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	20	-	13,2,5
H201A	3'-0"	7'-8"	F	WD	STN	2A	HM	PT	-	-	-	-	20	-	-
H204A	2'-2"	5'-2"	F	HM	PT	13	HM	PT	-	-	-	-	60	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
J100A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J101A	VIF	VIF	-	ETR	PTD	-	ETR	PTD	-	-	-	-	-	-	26
J102A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J103A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD					20MIN		8,13,5,18
									-	-	-	-			
J104A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J105A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J106A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J107A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J108A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J109A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J110A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5,18
J118A	3'-0"	7'-0"	N	WD	STN	-	-	PTD	-	-	-	-	20MIN	-	8,12
J119A	3'-0"	7'-0"	N	WD	STN	-	-	PTD	-	-	-	-	20MIN	-	8,12
J120A	3'-0"	7'-0"	N	WD	STN	-	-	PTD	-	-	-	-	20MIN	-	8,12
J121A	3'-0"	7'-0"	N	WD	STN	-	ETR	PTD	-	-	-	-	20MIN	-	8,12
J122A	3'-0"	7'-0"	N	WD	STN	-	ETR	PTD	-	-	-	-	20MIN	-	8,12
J123A	3'-0"	7'-0"	N	WD	STN	-	-	PTD	-	-	-	-	20MIN	-	8,12
J124A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	MAR	20MIN	-	1,12
J125A	3'-0"	7'-0"	F	WD	STN			PTD				MAR	20MIN		1,12
						-	-		-	-	-			-	
J126A	3'-0"	7'-0"	F	WD	STN	-	ETR	PTD	-	-	-	-	60MIN	-	12,
J127A	3'-0"	7'-0"	N	WD	STN	-	-	PTD	-	-	-	-	20MIN	-	8,12
J128A	3'-0"	7'-0"	N	WD	STN	-	ETR	PTD	-	-	-	-	20MIN	-	8,12
J130A	3'-0"	7'-0"	N	WD	STN	-	-	PTD	-	-	-	-	20MIN	-	8,12

NOTE: CONTRACTOR TO REMOVE ALL EXISTING DOOR CORES AND PROVIDE NEW CORES AND 2 KEYS TO EACH NEW CORE TO OWNERS KEY SYSTEM. THIS APPLIES TO ALL DOORS WHETHER INCLUDE IN SCHEDULE OR NOT (QTY= 400)

DOOR SCHEDULE

DOOR OPENING			DOOR			FRAME			DETAILS			THRESHOLD	U.L. LABEL	HARDWARE SET	REMARKS
NO.	WIDTH	HEIGHT	TYPE	MATERIAL	FINISH	TYPE	MATERIAL	FINISH	HEAD	JAMB	SILL				
FIRST FLOOR															
A100A	2 @3'-0"	7'-0"	H	FRP	PFN	-	-	-	-	-	-	AL	-	-	12,23,13,5
A113A	2 @3'-0"	7'-0"	H	FRP	PFN	-	-	-	-	-	-	AL	-	-	12,23,13,5
B128A	2 @3'-0"	7'-0"	H	FRP	PFN	4	AL	PFN	-	-	-	AL	-	-	2,7,13,5
B135A	2@3'-0"	7'-0"	H	FRP	PFN	12	AL	PFN	-	-	-	AL	-	-	2,7,13,5
B129A	VIF	VIF	-	ETR	PTD	-	ETR	PTD	-	-	-	-	-	-	26
B135B	3'-0"	7'-0"	F	FRP	PFN	1	AL	PFN	-	-	-	AL	-	-	2,13,5
C100A	2@ 4'-0"	8'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	-	-	13,24
C100B	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	2,13,5
C101A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	-	20MIN	-	12
C102A	3'-0"	7'-0"	F	WD	STN	-	ETR	PTD	-	-	-	-	20MIN	-	12
C103A	3'-0"	7'-0"	F	WD	STN	-	ETR	PTD	-	-	-	-	20MIN	-	12
C104A	2@3'-0"	7'-0"	F	WD	STN	-	ETR	PTD	-	-	-	-	20MIN	-	12
C122A	3'-0"	7'-0"	F	WD	STN	-	ETR	PTD	-	-	-	MAR	20MIN	-	12,15
C124A	3'-0"	7'-0"	F	WD	STN	-	ETR	PTD	-	-	-	MAR	20MIN	-	12,15
C128A	3'-0"	7'-0"	N	WD	STN	-	ETR	PTD	-	-	-	-	-	-	12,6
C135A	3'-0"	8'-0"	GL	GL	-	-	-	-	-	-	-	-	-	-	-
C137A	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	MAR	-	-	13,15
C138A	3'-0"	7'-0"	F	WD	STN	-	ETR	PTD	-	-	-	-	-	-	12
C141A	2 @ 3'-0"	7'-0"	H	WD	STN	-	ETR	PTD	-	-	-	-	20MIN	-	12,8
C145A	3'-0"	8'-0"	GL	GL	-	-	-	-	-	-	-	-	-	-	-
C145B	3'-0"	8'-0"	GL	GL	-	-	-	-	-	-	-	-	-	-	-
C146A	3'-0"	7'-0"	N	WD	STN	3	HM	PTD	-	-	-	-	-	-	6,13,5
C147A	3'-0"	7'-0"	F	FRP	PFN	1	AL	PFN	-	-	-	-	-	-	13,5
C148A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	-	-	6,13,5
C149A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5
C149B	3'-0"	7'-0"	N	WD	STN	-	HM	PTD	-	-	-	-	-	-	13,5
C153A	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	13,5
C154A	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	-	-	13
C155A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	13,8,5
C156A	3'-0"	7'-0"	H	WD	STN	5	HM	PTD	-	-	-	-	-	-	6,13
C157A	3'-0"	7'-0"	H	WD	STN	5	HM	PTD	-	-	-	-	-	-	6,13
C158A	3'-0"	7'-0"	H	WD	STN	5	HM	PTD	-	-	-	-	-	-	6,13
C159A	3'-0"	7'-0"	H	WD	STN	5	HM	PTD	-	-	-	-	-	-	6,13
C160A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	-	-	6,13
C161A	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	-	-	13
C162A	3'-0"	7'-0"	G	WD	STN	8	HM	PTD	-	-	-	-	20MIN	-	8,13,5
C162B	3'-0"	7'-0"	G	WD	STN	8	HM	PTD	-	-	-	-	20MIN	-	8,13,5,20
C164A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	-	-	13,6
C165A	3@3'-0"	6'-8"	G	AL	PFN	6	AL	PFN	-	-	-	-	-	-	6,13,3,20,5
C166A	3@3'-0"	6'-8"	G	AL	PFN	6	AL	PFN	-	-	-	AL	-	-	7,13,3,20,9,5
C167A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,13,5
C168A	2@4'-0"	8'-0"	F	WD	STN	1	HM	PTD	-	-	-	AL	-	-	13,24
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
E100A	2@(3'-0")	6'-8"	F	FRP	PFN	2	AL	PFN	-	-	-	AL	-	-	4,13,2,5
E100B	2@(3'-0")	6'-8"	F	FRP	PFN	2	AL	PFN	-	-	-	AL	-	-	4,13,2,5
E101A	2@(3'-0")	7'-0"	H	FRP	PFN	10	AL	PFN	-	-	-	AL	-	-	4,7,13,2,5
E106A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	45MIN	-	8,13
E106B	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	45MIN	-	8,13
E111A	3'-0"	6'-8"	F	WD	STN	-	HM	PTD	-	-	-	MAR	20MIN	-	12,15
E112A	2@(3'-0")	7'-0"	H	FRP	PFN	2	AL	PFN	-	-	-	AL	-	-	4,7,17,13
E122A	3'-0"	6'-8"	F	FRP	PFN	1	AL	PFN	-	-	-	AL	-	-	13,5
E122B	3'-0"	6'-8"	F	WD	STN		HM	PTD	-	-	-	-	20MIN		12
E123A	3'-0"	6'-8"	N	WD	STN	-	HM	PTD	-	-	-	-	20MIN	-	8,12
E124A	3'-0"	6'-8"	F	WD	STN	-	HM	PTD	-	-	-	-	20MIN	-	12
E126A	3'-0"	6'-8"	F	WD	STN	-	HM	PTD	-	-	-	-	60MIN	-	12
E128A	3'-0"	6'-8"	F	WD	STN	-	HM	PTD	-	-	-	-	20MIN	-	12
E129A	3'-0"	6'-8"	F	WD	STN	-	HM	PTD	-	-	-	-	60MIN	-	12
F100A	3'-0"	7'-0"	F	FRP	PFN	1	AL	PFN	-	-	-	AL	-	-	13,5
F101A	3'-0"	6'-8"	F	FRP	PFN	1	AL	PFN	-	-	-	AL	-	-	13,5
F102A	3'-0"	6'-8"	F	FRP	PFN	1	AL	PFN	-	-	-	AL	-	-	13,5
F103A	2@3'-0"	7'-0"	F	FRP	STN	-	HM	PTD	-	-	-	-	-	-	12,17
F106A	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	-	-	13
F107A	2@(3'-0")	7'-0"	N	WD	STN	2	HM	PTD	-	-	-	-	20MIN	-	8,13
F109A	2@(3'-0")	7'-0"	H	FRP	PFN	2	AL	PFN	-	-	-	AL	-	-	2,12,7,4
F109B	2@(3'-0")	7'-0"	H	WD	STN	2	HM	PTD	-	-	-	-	-	-	2,12,6,4
F118A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	-	60MIN	-	12
F119A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	-	60MIN	-	12
F120A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	MAR	-	-	12,15
F121A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	MAR	-	-	12,15
F122A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	MAR	-	-	12,15
F123A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	MAR	-	-	12,15
F125A	3'-0"	7'-0"	F	WD	STN	-	HM	PTD	-	-	-	-	-	-	12,15
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
F127A	3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	13,5
G100A	3'-0"	6'-8"	F	FRP	PFN	1	AL	PFN	-	-	-	AL	-	-	13,5
G104A	3'-0"	7'-0"	H	WD	STN	1	HM	PTD	-	-	-	-	-	-	13,18
G106A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	8,2,13
G107A	3'-0"	6'-8"	F	FRP	STN	1	AL	PFN	-	-	-	AL	-	-	13,5
G107B	3'-0"	7'-0"	N	WD	STN	3	HM	PTD	-	-	-	-	20MIN	-	8,2,13,11
G110A	2@(3'-0")	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	60MIN	-	13
G110B	3'-0"	7'-0"	N	WD	STN	1	HM	-	-	-	-	-	60MIN	-	13
G112A	2@3'-0"	7'-0"	N	WD	STN	2	HM	-	-	-	-	-	20MIN	-	13,5,8
H100A	3'-0"	7'-0"	N	WD	STN	1	HM	PTD	-	-	-	-	20MIN	-	13,5,6
H100B	2@3'-0"	7'-0"	F	WD	STN	1	HM	PTD	-	-	-	-	-	-	13,5
H100C	3'-0"	6'-8"	F	FRP	PFN	1	AL	-	-	-	-	-	-	-	13,5
H100D	6'-10"	10'-3"	OH	AL	RFA	-	-	-	-	-	-	-	-	-	25
H101A	3'-0"	7'-0"	H	WD	STN	-	HM	PTD	-	-	-	-	-	-	6,12

WAKELY ASSOCIATES, INC.
ARCHITECTS

30500 VAN DYKE AVENUE
SUITE M-7
WARREN, MICHIGAN 48093
PH: 586.573.4100
FX: 586.573.0822
www.WakelyAIA.com

FARMINGTON PUBLIC SCHOOLS - 2015 BOND

2017 RENOVATIONS

NORTH FARMINGTON HIGH SCHOOL

NORTH FARMINGTON HIGH SCHOOL

DOOR SCHEDULE & DETAILS

PRELIMINARY ☐
DESIGN DEVELOPMENT ☐
CONSTRUCTION ■
FINAL RECORD ☐

DRAWN BY NJL
CHECKED BY BJS

REVISIONS
Addendum #01 9/27/17

DATE: SEPTEMBER 11, 2017

SHEET NO.

A7.1FN

JOB NO. 161664D

ROOM FINISH SCHEDULE

NO.	ROOM NAME	FLOOR	BASE	WALLS	CEILING MATERIAL	CEILING HGT.	REMARKS
E110	EXISTING CLASSROOM	-	-	ETR	ETR	-	-
E111	EXISTING TOILET	PCT	4PCT	CMU/EPT/PCT	GB/PT	-	2
E112	EXISTING CORRIDOR	LVT	RB	PT	ACT	-	2,4
E113	EXISTING TOILET	PCT	4PCT	CMU/EPT/PCT	GB/PT	-	-
E114	EXISTING OFFICE	PCT	4PCT	PT	ACT	-	-
E115	EXISTING SHOWER	PCT	4PCT	PCT	GYP/EPT	-	-
E116	EXISTING STORAGE	ETR	ETR	PT	GB/PT	-	-
E117	EXISTING OFFICE	PCT	4PCT	PT	ACT	-	-
E118	EXISTING TOILET	PCT	4PCT	EPT	GB/PT	-	-
E119	EXISTING SHOWER	PCT	4PCT	PCT	GB/EPT	-	-
E120	EXISTING STORAGE	PCT	4PCT	PT	EXP/PT	-	-
E121	EXISTING STORAGE	PCT	4PCT	PT	EXP/PT	-	-
E122	EXIST MEN LOCKER ROOM	PCT	4PCT	PT	ACT	-	-
E123	NEW CLASSROOM	LVT	RB	PT	ACT	-	2
E124	EXIST WOMEN LOCKER ROOM	PCT	4PCT	PT	ACT	-	-
E125	-	-	-	PT	EXP/PT	-	-
E126	FOOTBALL STORAGE	LVT	RB	PT	ACT	-	2
E127	STORAGE	LVT	RB	PT	ACT	-	2
E128	EXISTING TOILET	PCT	4PCT	CMU/PT/PCT	GB/PT	-	2
E129	ELECTRICAL	ETR	ETR	ETR	ETR	-	-
F100	EXISTING AUTO CLASSROOM	-	-	PT@NEW	-	-	-
F101	EXISTING AUTO SHOP	-	-	-	-	-	-
F102	EXIST AUXILIARY GYMNASIUM	-	-	PT	-	-	4
F103	STORAGE	-	-	-	-	-	-
F104	EXISTING STAIR	ETR	ETR	PT	ETR	-	-
F105	TRAINING ROOM	LVT	RB	PT	TECTUM	-	-
F106	MECH	-	-	-	EXP	-	-
F107	NEW CORRIDOR	LVT	RB	PT	ACT	-	-
F107A	ENTRY	LVT	RB	PT	ACT	-	-
F108	EXISTING CORRIDOR	LVT	RB	PT	ACT	-	2,4
F109	EXIST VESTIBULE	WC	RB	PT	-	-	4,9
F110	EXIST CORRIDOR	LVT	RB	PT	ACT	-	2,4
F111	EXISTING GYMANSIUM	-	-	PT	EXP/PT	-	4,5,10
F112	STORAGE	ETR	ETR	PT	EXP/PT	-	-
F113	TEAM ROOM	PCT/ETR	ETR	ETR	ETR	-	-
F114	LOCKER ROOM	PCT/ETR	ETR	ETR	ETR	-	12
F115	COACH OFFICE	-	-	-	-	-	-
F116	TOILET	-	-	-	-	-	-
F117	STORAGE	-	-	-	-	-	-
F118	STORAGE	LVT	RB	PT	EXP/PT	-	-
F119	STORAGE	ETR	ETR	ETR	ETR	-	-
F120	LOCKER ROOM	LVT	RB	EPT	EXP/PT/TEC	-	4
F121	OFFICE	LVT	RB	PT	TEC	-	-
F122	COACH OFFICE	LVT	RB	PT	TEC	-	-
F123	TOILET	LVT	RB	EPT	GB/PT	-	-
F124	EXISTING CORRIDOR	LVT	RB	PT	ACT	-	2,4,11
F125	LOCKER ROOM	LVT	RB	EPT	EPT/TEC	-	4
F126	ENTRY	PCT	4PCT	PT	ACT	-	-
F127	NEW ADA LOCKER ROOM	PCT	4PCT	EPT	TEC	-	-
F128	NEW SHOWER	PCT	4PCT	PCT	EPT	-	-
G100	ART ROOM	LVT	RB	PT	ETR	-	-
G101	STORAGE	LVT	RB	PT	PT	-	-
G102	-	-	-	-	-	-	-
G103	KILN	-	-	-	ETR	-	-
G104	PHOTOGRAPHY	LVT	RB	PT	ACT	-	-
-	-	-	-	-	-	-	-
G106	ART ROOM	LVT	RB	PT	ETR	-	-
G107	NEW WEIGHT ROOM	RBF	RB	PT	EXP/PT	-	4,5
G110	NEW WOOD SHOP	LVT	RB	PT	ACT	-	2
G111	EXISTING CAD LAB	LVT	RB	PT	ACT	-	2
G112	EXISTING COMPUTER LAB	LVT	RB	PT	ETR	-	-
G113	CORRIDOR	LVT	RB	PT	ACT	-	2,4
G114	BOYS TOILET	ETR	ETR	EPT	GB/PT	-	-
G115	GIRLS TOILET	ETR	ETR	EPT	GB/PT	-	-
G116	CUSTODIAN	ETR	ETR	-	-	-	-
G117	DANCE STUDIO	ETR	ETR	PT	ETR	-	
G118	CORRIDOR	LVT	RB	PT	ACT/PADS	-	2,4,11
G119	TECH. ROOM	ETR	ETR	ETR	ETR	-	
G120	STORAGE	ETR	ETR	ETR	ETR	-	-
G121	STORAGE	ETR	ETR	ETR	ETR	-	-
H100	EXIST. TV STUDIO	LVT	RB	PT	EXP/PT	-	-
H101	EXIST. CONTROL ROOM	AF	RB	PT	ACT	-	2
H102	STORAGE	LVT	RB	PT	EXP/PT	-	-
H103	OFFICE	AF	RB	PT	ACT	-	-
H104	PASSAGE	LVT	RB	PT	ACT	-	2
H105	EXIST. CLASSROOM	AF	RB	PT	ACT	-	2
H106	EXIST. CORRIDOR	LVT	RB	PT	ETR	-	-
H107	EXIST. EDITING	AF	RB	PT	ETR	-	-
H108	EXIST. EDITING	AF	RB	PT	ETR	-	-
H109	EXIST. SET DESIGN	ETR	ETR	PT	ETR	-	-
						-	-
H110	ELECTRICAL	ETR	ETR	PT	ETR	-	-
H111	EXIST. TOILET	ETR	ETR	EPT	ETR	-	-
H112	EXIST. UNIFORM STORAGE	LVT	RB	PT	ETR	-	-
H113	EXIST. CORRIDOR	LVT	RB	PT	ACT	-	2,4
H114	EXIST. INSTRUMENT STOR.	LVT	RB	PT	ETR	-	-
H115	EXIST. BAND ROOM	LVT	RB	PT	ETR	-	-
H116	EXIST. OFFICE	LVT	RB	PT	ETR	-	-
H117	EXIST. CHOIR ROOM	LVT	RB	PT	ETR	-	-
H118	EXIST. TOILET	ETR	ETR	EPT	ETR	-	-
H119	EXIST. STORAGE	ETR	ETR	EPT	ETR	-	-

ROOM FINISH SCHEDULE

NO.	ROOM NAME	FLOOR	BASE	WALLS	CEILING MATERIAL	CEILING HGT.	REMARKS
-	-	-	-	-	ETR	-	-
-	-	-	-	-	ETR	-	-
-	-	-	-	-	ETR	-	-
-	-	-	-	-	ETR	-	-
-	-	-	-	-	ETR	-	-
C120	EXISTING HOME ECONOMICS	LVT	RB	PT	ETR	-	-
C121	EXISTING STORAGE	-	-	-	ETR	-	-
C122	EXISTING TOILET	PCT	4PCT/CMU	EPT/PCT	GB/EPT	-	-
C123	EXISTING STORAGE	-	-	-	ETR	-	-
C124	EXISTING TOILET	PCT	4PCT/CMU	EPT/PCT	GB/EPT	-	-
C125	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
C126	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
C127	MECHANICAL	-	-	PT	ETR	-	-
C128	NEW MEETING ROOM	CPT	RB	PT	ACT	-	2,8
C129	NEW OFFICE	CPT	RB	PT	ACT	-	2,8
C130	NEW TEACHER'S LOUNGE	LVT/CPT	RB	PT	ACT	-	2,3,4,8
C131	NEW KITCHEN	LVT	RB	PT	ACT	-	2,3,4,8
C132	NEW MEETING ROOM	CPT	RB	PT	ACT	-	2,8
C133	-	-	-	-	-	-	-
C134	SITTING AREA	CPT	RB	PT	ACT	-	2,8
C135	NEW MEETING ROOM	CPT	RB	PT	ACT	-	2,8
C136	-	-	-	-	-	-	-
C137	NEW TOILET	PCT	4PCT/CMU	EPT/PCT	ACT	-	2
C138	EXISTING TOILET	PCT	4PCT/CMU	EPT/PCT	ETR/EPT	-	-
C139	EXISTING HALLWAY	CPT	RB	PT	ACT	-	2,8
C140	EXISTING CORRIDOR	LVT	RB	PT	ACT/PADS	-	2,4
C141	EXISTING MEDIA CENTER	LVT/CPT	RB	PT	ACT	-	4,8
C142	NEW STUDENT LOUNGE	LVT	RB	BR/PT	ACT	-	4
C143	NEW GROUP STUDY	CPT	RB	PT	ACT	-	1
C144	NEW GROUP STUDY	CPT	RB	PT	ACT	-	1
C145A/B	NEW LARGE GROUP STUDY	CPT	RB	PT	ACT	-	1
C146	BUSINESS COMPUTER LAB	LVT	RB	PT	ACT	-	-
C147	MECHANICAL	-	-	-	EXP/PT	-	-
C148	SPEECH OFFICE	CPT	RB	PT	ACT	-	-
C149	NEW PASSAGE	LVT	RB	PT	ACT	-	-
C150	EXISTING STAIR	LVT/RTR	RB	PT	EXP/PT	-	4
C151	EXISTING VESTIBULE	LVT	RB	PT	ETR/PT/ACT	-	4
C152	NEW CLASSROOM	LVT	RB	PT	ETR	-	-
C153	TECH.	ETR	-	PT	ETR	-	-
C154	NEW STAFF TOILET	PCT	4PCT	EPT	ACT	-	-
C155	NEW STAFF	CPT	RB	PT	ACT	-	-
C156	NEW OFFICE	CPT	RB	PT	ACT	-	-
C157	NEW OFFICE	CPT	RB	PT	ACT	-	-
C158	NEW OFFICE	CPT	RB	PT	ACT	-	-
C159	NEW OFFICE	CPT	RB	PT	ACT	-	-
C160	NEW OFFICE	CPT	RB	PT	ACT	-	-
C161	NEW STORAGE	LVT	RB	PT	ACT	-	-
C162	NEW ATTENDANCE	CPT	RB	PT	ACT	-	-
C163	NEW MAIN OFFICE	CPT	RB	PT	ACT	-	8
C164	NEW CONFERENCE	CPT	RB	PT	ACT	-	1
C165	LOBBY	LVT/WC	RB	PT	ACT	-	2/4
C166	VESTIBULE	WC	RB	PT	ETR/PT	-	2/4
C167	NEW AB OFFICE	CRT	RB	PT	ACT	-	2,8
C168	EXISTING CORRIDOR	LVT	RB	PT	ACT	-	2,4,11
-	-	-	-	-	-	-	-
D100	EXISTING RECIEVING	ETR	ETR	PT	EXP	-	-
D101	EXISTING TOILET	ETR	ETR	EPT	ETR	-	-
D102	EXISTING STORAGE	ETR	ETR	PT	-	-	-
D103	EXISTING STORAGE	ETR	ETR	PT	-	-	-
D104	EXISTING STORAGE	ETR	ETR	PT	-	-	-
D105	EXISTING FREEZER	-	-	-	-	-	-
D106	EXISTING COOLER	-	-	-	-	-	-
D107	EXISTING KITCHEN	-	-	EPT	ETR	-	4
D108	EXISTING BOILER	-	-	-	EXP	-	-
D109	EXISTING COOLER	-	-	-	-	-	-
D110	EXISTING SERVERY	ETR	ETR	EPT	ETR	-	4
D111	EXISTING SERVERY	ETR	ETR	EPT	ETR	-	4
D112	EXISTING CAFETERIA	LVT	RB	PT	ETR	-	4
D113	EXISTING DRY GOODS	-	-	-	-	-	-
D114	EXISTING STORAGE	ETR	ETR	PT	ETR	-	-
D115	EXISTING STORAGE	ETR	ETR	-	ETR	-	-
E100	EXISTING POOL	-	-	-	-	-	13
E101	EXISTING CORRIDOR	LVT/WC	RB	PT	ACT/PADS	-	4
E102	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
-	-	-	-	-	-	-	-
E104	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
E105	NEW CLASSROOM	LVT	RB	PT	ACT	-	2
E106	NEW CLASSROOM	LVT	RB	PT	ACT	-	2
E107	POOL MECHANICAL	ETR	ETR	ETR	ETR	-	-
E108	STORAGE	ETR	ETR	-	ETR	-	-
E109	EXISTING MECH.	ETR	ETR	ETR	ETR	-	-

ROOM FINISH SCHEDULE GENERAL NOTES (APPLIES TO ALL ROOMS):

1. PAINT ALL EXPOSED ITEMS IN ROOMS: DOOR FRAMES, WINDOW FRAMES, DUCTS, PIPES, CONDUITS, ROOF FRAMING, ROOF DECK, ETC.
2. SEE ELEVATIONS & DETAILS FOR GYP BD SOFFIT HEIGHTS & SIZES.
3. SEE ELEVATIONS & DETAILS FOR WALL TILE HEIGHTS & LOCATIONS
4. SEE PLANS FOR FLOOR PATTERNS AND WALK-OFF CARPET LOCATIONS
5. PROVIDE VINYL TRANSITION STRIPS AT DISSIMILAR FLOOR FINISHES - CARPET / TILE, CARPET / CONCRETE, ETC.
6. PAINT NEW WALL CONSTRUCTION TO MATCH EXISTING IN ROOM (VIF)
7. PROVIDE STAINLESS STEEL SCHLUTER TRANSITIONS AT ALL HARD TILE / CARPET LOCATIONS.
8. MODIFY EXISTING LAY-IN CEILINGS AS REQUIRED TO ACCOMMODATE NEW WALL PLACEMENT.
9. REMOVE / REINSTALL EXISTING LAY-IN CEILING SYSTEMS AS REQUIRED FOR OVERHEAD PIPING, DUCT WORK, ETC (VIF).
10. VERIFY WITH EACH SCHOOL PRINCIPAL **BEFORE PAINTING OVER** TOP OF EXISTING PAINTED MURALS IN CORRIDORS AND CLASSROOMS.
11. ALL TOILET ROOMS CALLING FOR PAINT TO BE EPOXY PAINT (WALLS & CEILINGS).

ROOM FINISH SCHEDULE

NO.	ROOM NAME	FLOOR	BASE	WALLS	CEILING MATERIAL	CEILING HGT.	REMARKS
A100	EXISTING CORRIDOR	LVT/WC	RB	PT	ACT/PADS	-	2,4
A101	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A102	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A103	EXISTING STORAGE	-	-	-	ETR	-	-
A104	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A105	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A106	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A107	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A108	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A109	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A110	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A111	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
A112	EXISTING JAN. CLOSET	-	-	-	ETR	-	-
A113	EXISTING CORRIDOR	LVT/WC	RB	PT	ACT/PADS	-	2,4
-	-	-	-	-	-	-	-
B100	EXISTING MENS TOILET	ETR	ETR	ETR/EPT	ETR/EPT	-	-
B101	STORAGE	ETR	-	PT	ETR/PT	-	-
B102	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B103	EXISTING STORAGE	LVT	RB	PT	ETR	-	-
B104	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B105	EXISTING CORRIDOR	LVT	RB	PT	ACT/PADS	-	2,4,11
B106	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B107	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B108	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B109	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B110	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B111	EXISTING SCIENCE ROOM	LVT	RB	PT	ETR	-	-
B112	EXISTING SCIENCE ROOM	LVT	RB	PT	ETR	-	-
B113	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B114	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B115	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B116	EXISTING SCIENCE ROOM	LVT	RB	PT	ETR	-	-
B117	EXISTING SCIENCE ROOM	LVT	RB	PT	ETR	-	-
B118	EXISTING CLASSROOM	ETR	-	-	ETR	-	-
B119	EXISTING HALLWAY	LVT	RB	PT	ETR	-	-
B120	EXISTING OFFICE	LVT	RB	PT	ETR	-	-
B121	EXISTING STORAGE	ETR	ETR	PT	PT	-	-
-	-	-	-	-	-	-	-
B123	EXISTING STORAGE	ETR	ETR	PT	ETR/PT	-	-
B124	EXISTING WOMEN'S TOILET	ETR	ETR	EPT/EPT	ETR/EPT	-	-
B125	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B126	EXISTING PREP	LVT	RB	PT	ETR	-	-
B127	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
B128	EXISTING VESTIBULE	RTR/WC	RB	PT	ETR	-	2,4,9
B129	EXISTING CORRIDOR	LVT	RB	PT	ACT/PADS	-	2,4,11
B130	EXISTING COMPUTER LAB	LVT	RB	PT	ACT/ALT#3	-	-
B131	EXISTING CLASSROOM	LVT	RB	PT	ACT/ALT#3	-	-
B132	EXISTING CLASSROOM	LVT	RB	PT	ACT/ALT#3	-	-
B133	EXISTING CLASSROOM	LVT	RB	PT	ACT/ALT#3	-	-
B134	EXISTING ELEVATOR MECH.	-	-	-	-	-	-
B135	EXISTING VESTIBULE	RTR/WC	RB	PT	ETR	-	2,4,9
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
C100	EXISTING CORRIDOR	LVT	RB	PT	ETR	-	2,4,11
C101	EXISTING STORAGE	LVT	RB	PT	ETR	-	-
C102	EXISTING STORAGE	LVT	RB	PT	ETR	-	-
C103	EXISTING STORAGE	-	-	-	ETR	-	-
C104	EXISTING STORAGE	-	-	-	ETR	-	-
C105	EXISTING STORAGE	-	-	-	ETR	-	-
C106	EXISTING SCHOOL STORE	LVT/CP	RB	PT	ETR	-	4
C107	EXISTING STORAGE	LVT	RB	PT	ETR	-	-
C108	EXISTING OFFICE	LVT	RB	PT	ETR	-	-
C109	EXIST COUNSELING OFFICE	CPT	RB	PT	ETR	-	4
C110	EXISTING CONFERENCE	CPT	RB	PT	ETR	-	4
C111	EXISTING CONFERENCE	CPT	RB	PT	ETR	-	-
C112	EXISTING CORRIDOR	CPT	RB	PT	ETR	-	-
C113	EXISTING OFFICE	CPT	RB	PT	ETR	-	-
C114	EXISTING OFFICE	CPT	RB	PT	ETR	-	-
C115	EXISTING OFFICE	CPT	RB	PT	ETR	-	-
C116	EXISTING OFFICE	CPT	RB	PT	ETR	-	-
C117	EXISTING OFFICE	CPT	RB	PT	ETR	-	-
C118	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-
C119	EXISTING CLASSROOM	LVT	RB	PT	ETR	-	-

ROOM FINISH SCHEDULE ABBREVIATIONS:

ACT	ACOUSTICAL CEILING TILE IN METAL GRID	PT	PAINT
BR	BRICK	RB	4" RESILIENT COVE BASE
CMU	CONCRETE MASONRY UNIT	RTR	RUBBER TREADS AND RISERS
CPT	CARPET	SC	SEALED CONCRETE
EPT	EPOXY PAINT	TEC	2'-0" x 2'-0" TECTUM IN GRID SYSTEM
ETR	EXISTING TO REMAIN	LVT	LUXURY VINYL TILE FLOOR
EXP	EXPOSED CONSTRUCTION	VACT	VINYL FACED ACT
GB	GYPSUM BOARD	VB	VENTED BASE
PCT	PORCELAIN CERAMIC TILE	WC	WALK-OFF CARPET
4PCT	4" PORCELAIN CERAMIC TILE COVE BASE	WD	WOOD
		AF	ACCESS FLOORING
		RBF	1/2" RUBBER FLOOR

ROOM FINISH SCHEDULE REMARKS:

1. PROVIDE MARKER BD. PAINT ON WALLS - FULL HEIGHT AND WIDTH.
2. NEW CEILING TO BE PLACED AT SAME HEIGHT AS EXISTING (VIF).
3. SEE FLOOR PLANS FOR EXTENT OF NEW FLOORING & PATTERNS.
4. MULTIPLE WALL PAINT COLORS & PATTERNS WILL BE USED IN THIS ROOM.
5. MULTIPLE COLORS WILL BE USED ON EXPOSED ROOF DECK, FRAMING, DUCTWORK, ETC.
6. SEE ELEVATIONS AND NOTES FOR HEIGHT OF WALL TILE. PAINT CMU WALL ABOVE TILE (VERIFY EACH ROOM DIMENSION IN FIELD).
7. SEE ELEVATIONS AND DETAILS FOR SOFFITS / WALL MATERIALS TO BE PAINTED.
8. REMOVE WALL COVERING, SKIM COAT WALLS, SAND AND PREP FOR NEW PAINT AS REQUIRED.
9. PROVIDE HOLD DOWN CLIPS IN ACOUSTIC CEILING TILE SYSTEM.
10. PROVIDE GYM FLOOR STRIPING AS DETAILED ON ENLARGED PLANS.
11. ALT BID #4 FOR FLOORING.
12. PROVIDE CERAMIC TILE @ REMOVED WALLS, TO MATCH EXISTING.
13. EPOXY PAINT ON FLOOR BELOW POOL BLEACHERS IF ALT. 6 IS ACCEPTED.

WA
WAKELY ASSOCIATES, INC.
ARCHITECTS
30500 VAN DYKE AVENUE
SUITE M-7
WARREN, MICHIGAN 48093
PH: 586.573.4100
FX: 586.573.0822
www.WakelyAIA.com

FARMINGTON PUBLIC SCHOOLS - 2015 BOND
2017 RENOVATIONS
NORTH FARMINGTON HIGH SCHOOL

NORTH FARMINGTON HIGH SCHOOL

ROOM FINISH SCHEDULE

PRELIMINARY ☐
DESIGN DEVELOPMENT ☐
CONSTRUCTION ■
FINAL RECORD ☐

DRAWN BY NJL
CHECKED BY BJS

REVISIONS
Addendum #01 9/27/17

DATE: SEPTEMBER 11, 2017

SHEET NO.
A7.2FN

JOB NO. 161664D

DETAILS SHOWN FOR REFERENCE ONLY FINAL COLORS AND PATTERNS TO BE SELECTED. PROVIDE FOR COLOR QUANTITIES CALL OUT IN FLOORING LEGEND

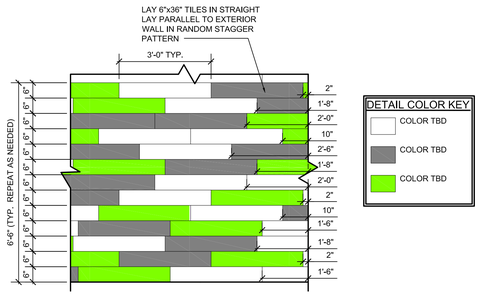

A / A8.3FN — FLOOR PATTERN DETAIL

SCALE: 1/2" = 1'-0"

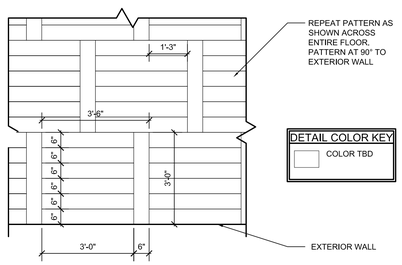

B / A8.3FN — FLOOR PATTERN DETAIL

SCALE: 1/2" = 1'-0"

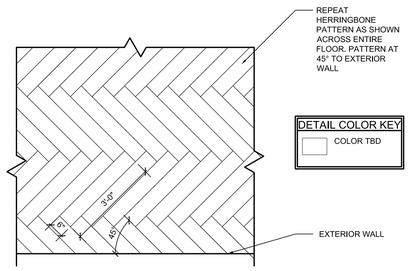

C / A8.3FN — FLOOR PATTERN DETAIL

SCALE: 1/2" = 1'-0"

DETAILS SHOWN FOR REFERENCE ONLY FINAL COLORS AND PATTERNS TO BE SELECTED. PROVIDE FOR COLOR QUANTITIES CALL OUT IN FLOORING LEGEND

TILE FLOORING LEGEND

- LVT - CLASSROOM PATTERN. PROVIDE FOR 2 COLORS. FINAL COLORS AND PATTERN TBD.
- LVT - HALLWAY PATTERN. PROVIDE FOR 3 COLORS. FINAL COLORS AND PATTERN TBD.
- LVT - CAFETERIA PATTERN. PROVIDE FOR 3 COLORS. FINAL COLORS AND PATTERN TBD.
- WALKOFF CARPET
- PCT
- CARPET
- RUBBER FLOORING

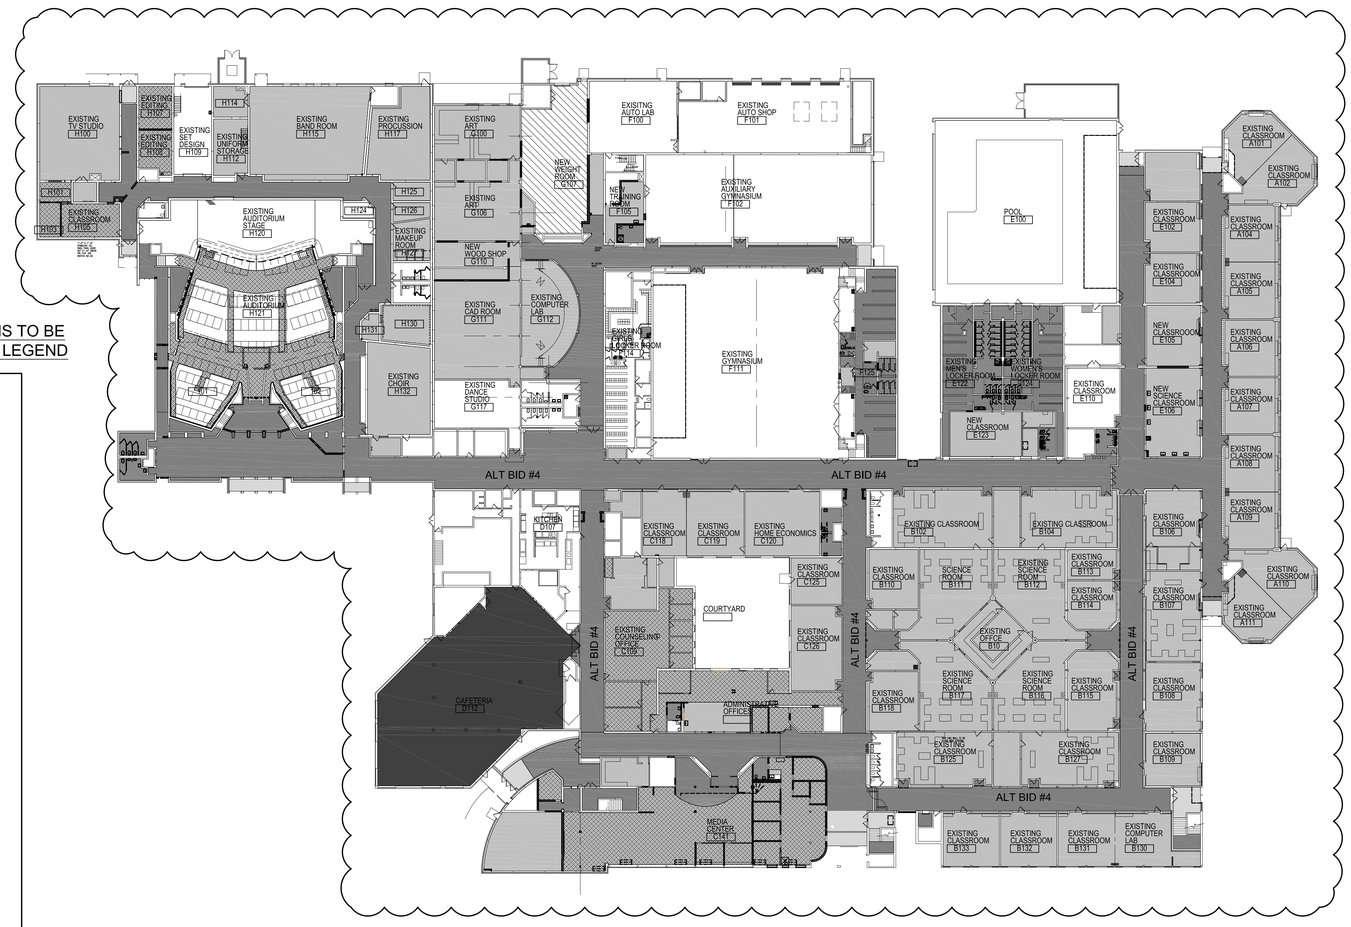

1 / A1.1 — COMPOSITE FIRST FLOOR TILE PLAN

SCALE: 1/32" = 1'-0"

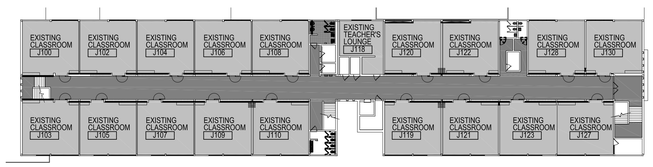

2 / A1.1 — COMPOSITE SECOND FLOOR TILE PLAN

SCALE: 1/32" = 1'-0"

WAKELY ASSOCIATES, INC.
ARCHITECTS

30500 VAN DYKE AVENUE
SUITE M–7
WARREN, MICHIGAN 48093
PH: 586.573.4100
FX: 586.573.0822
www.WakelyAIA.com

FARMINGTON PUBLIC SCHOOLS - 2015 BOND
2017 RENOVATIONS
NORTH FARMINGTON HIGH SCHOOL

NORTH FARMINGTON HIGH SCHOOL

FIRST & SECOND FLOOR TILE PLANS

PRELIMINARY ☐
DESIGN DEVELOPMENT ☐
CONSTRUCTION ■
FINAL RECORD ☐

DRAWN BY NJL
CHECKED BY BJS

REVISIONS
Addendum #01 9/27/17

DATE: SEPTEMBER 11, 2017

SHEET NO.
A8.3FN

JOB NO. 161664D

GENERAL NOTES:

1) ALL NEW THEATRICAL FIXTURES ARE TO BE LED LAMP SOURCES.

2) ONLY THEATRICAL FIXTURES MANUFACTURED BY ELECTRONIC THEATRE CONTROLS ARE APPROVED.

3) IT IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR TO CROSS-REFERENCE ALL SHEETS AND SPECIFICATIONS IN ORDER TO PROVIDE A COMPLETE AND WORKING SYSTEM.

4) ALL CONTROL STATIONS AND OUTLET BOXES ARE TO BE STANDARD PRODUCT WITH STANDARD LABELING UNLESS OTHERWISE NOTED.

5) IT IS THE RESPONSIBILITY OF THE THEATRICAL LIGHTING VENDOR TO PROVIDE ALL BLACK IRON PIPE REQUIRED FOR STAGE PLUG STRIPS OR OTHER THEATRICAL LIGHTING POSITIONS.

6) THE ELECTRICAL CONTRACTOR IS TO COORDINATE ALL STAGE LIGHTING WITH THEATRICAL LIGHTING VENDOR, PRIOR TO INSTALLATION.

7) ALL DIMMING SYSTEM EQUIPMENT IS TO BE INSTALLED BY THE ELECTRICAL CONTRACTOR.

8) ALL LIGHTING CONTROL SYSTEMS EQUIPMENT, NOT INCLUDING TRANSFORMERS, AND OTHER ELECTRICAL SWITCHING EQUIPMENT, IS SUPPLIED BY THE THEATRICAL LIGHTING VENDOR FOR INSTALLATION BY THE ELECTRICAL CONTRACTOR.

SUBSTITUTION OF PRODUCT

EQUIPMENT SPECIFIED IN SHEETS AND SPECIFICATIONS, WHETHER CONTRACTOR OR OWNER FURNISHED, IS NOT TO BE SUBSTITUTED WITHOUT PRIOR WRITTEN CONSENT OF LIGHTING CONSULTANT OR ENGINEER.

CONDUIT PATHS

ALL CONDUIT SHALL BE RUN FROM ABOVE AND DROP DOWN AS NEEDED AT ALL DEVICES. DO NOT BLOCK STAGE LIGHTING INSTRUMENT POSITIONS.

EMERGENCY LIGHTING

EMERGENCY LIGHTING IN ITS ENTIRETY IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR. VERIFY WITH ENGINEER PRIOR TO INSTALLATION.

DO NOT COMMON NEUTRALS

SYSTEM BASED ON ETC LIGHTING PRODUCTS

A COMPLETE MANUFACTURER SUPPLIED INTERCONNECTION DIAGRAM IS TO BE PROVIDED PRIOR TO ROUGH-IN ON ALL EQUIPMENT AND LOW VOLTAGE WIRING.

1 GENERAL NOTES
NO SCALE

THEATRICAL NOTES

1) ALL CIRCUITS ARE TO HAVE A SEPARATE NEUTRAL.

2) PULL 2 #10 ALL LOADS.

3) FINAL CIRCUITING TO BE COMPLETED PRIOR TO INSTALLATION

4) CIRCUIT ROSTERS AND RISERS ARE FOR BID REFERENCE ONLY. COMPLETE INSTALLATION DOCUMENTS ARE TO BE SUPPLIED PRIOR TO START OF INSTALLATION.

5) ALL CIRCUITS ARE TO BE 120V.

6) VERIFY MOUNTING OF EACH OUTLET BOX PRIOR TO ORDER.

7) ALL FUTURE AND SPARE CIRCUITS ARE REQUIRED

8) COORDINATE DIMMING RACK LAYOUT WITH ENGINEER.

9) COORDINATE ALL LIGHTING WITH ARCHITECT AND ENGINEER PRIOR TO INSTALLATION.

10) ALL LINE VOLTAGE WIRING IS SUPPLIED, INSTALLED AND TERMINATED BY THE ELECTRICAL CONTRACTOR.

11) ALL LOW VOLTAGE CONTROL WIRING IS SUPPLIED AND INSTALLED BY THE ELECTRICAL CONTRACTOR.

12) ALL LOW VOLTAGE CONTROL WIRING TERMINATIONS ARE BY THE LIGHTING CONTROL SYSTEMS MANUFACTURER.

2 THEATRICAL NOTES
NO SCALE

DR-1						
DIM RACK	CT#	DMX#	DESCRIPTION	TYPE	LOAD	MODULE
A	1	1	STAGE RIGHT ELECTRIC # 1	LED	1350	D20
A	2	2	STAGE RIGHT ELECTRIC # 1	LED	1350	D20
A	3	3	STAGE RIGHT ELECTRIC # 1	LED	1350	D20
A	4	4	STAGE LEFT ELECTRIC # 1	LED	1350	D20
A	5	5	STAGE LEFT ELECTRIC # 1	LED	1350	D20
A	6	6	STAGE LEFT ELECTRIC # 1	LED	1350	D20
A	7	7	STAGE RIGHT ELECTRIC # 2	LED	1350	D20
A	8	8	STAGE RIGHT ELECTRIC # 2	LED	1350	D20
A	9	9	STAGE RIGHT ELECTRIC # 2	LED	1350	D20
A	10	10	STAGE LEFT ELECTRIC # 2	LED	1350	D20
A	11	11	STAGE LEFT ELECTRIC # 2	LED	1350	D20
A	12	12	STAGE LEFT ELECTRIC # 2	LED	1350	D20
A	13	13	STAGE RIGHT ELECTRIC # 3	LED	1350	D20
A	14	14	STAGE RIGHT ELECTRIC # 3	LED	1350	D20
A	15	15	STAGE RIGHT ELECTRIC # 3	LED	1350	D20
A	16	16	STAGE LEFT ELECTRIC # 3	LED	1350	D20
A	17	17	STAGE LEFT ELECTRIC # 3	LED	1350	D20
A	18	18	STAGE LEFT ELECTRIC # 3	LED	1350	D20
B	19	19	STAGE RIGHT ELECTRIC CYC	LED	1350	D20
B	20	20	STAGE RIGHT ELECTRIC CYC	LED	1350	D20
B	21	21	STAGE RIGHT ELECTRIC CYC	LED	1350	D20
B	22	22	STAGE RIGHT ELECTRIC CYC	LED	1350	D20
B	23	23	STAGE LEFT ELECTRIC CYC	LED	1350	D20
B	24	24	STAGE LEFT ELECTRIC CYC	LED	1350	D20
B	25	25	STAGE LEFT ELECTRIC CYC	LED	1350	D20
B	26	26	STAGE LEFT ELECTRIC CYC	LED	1350	D20
B	27	27	HOUSE ELECTRIC # 4	LED	1350	D20
B	28	28	HOUSE ELECTRIC # 4	LED	1350	D20
B	29	29	HOUSE ELECTRIC # 4	LED	1350	D20
B	30	30	HOUSE ELECTRIC # 3	LED	1350	D20
B	31	31	HOUSE ELECTRIC # 3	LED	1350	D20
B	32	32	HOUSE ELECTRIC # 3	LED	1350	D20
B	33	33	HOUSE ELECTRIC # 2	LED	1350	D20
B	34	34	HOUSE ELECTRIC # 2	LED	1350	D20
B	35	35	HOUSE ELECTRIC # 2	LED	1350	D20
B	36	36	HOUSE ELECTRIC # 1	LED	1350	D20
C	37	37	HOUSE ELECTRIC # 1	LED	1350	D20
C	38	38	HOUSE ELECTRIC # 1	LED	1350	D20
C	39	39	HOUSE ELECTRIC # 5	LED	1350	D20
C	40	40	HOUSE ELECTRIC # 5	LED	1350	D20
C	41	41	HOUSE ELECTRIC # 5	LED	1350	D20
C	42	42	PLUGBOX 1	LED	1350	D20
C	43	43	PLUGBOX 2	LED	1350	D20
C	44	44	PLUGBOX 3	LED	1350	D20
C	45	45	PLUGBOX 4	LED	1350	D20
C	46	46	PLUGBOX 5	LED	1350	D20
C	47	47	PLUGBOX 5	LED	1350	D20
C	48	48	PLUGBOX 6	LED	1350	D20
C	49	49	PLUGBOX 7	LED	1350	D20
C	50	50	PLUGBOX 7	LED	1350	D20
C	51	51	PLUGBOX 8	LED	1350	D20
C	52	52	PLUGBOX 9	LED	1350	D20
C	53	53	PLUGBOX 10	LED	1350	D20
C	54	54	PLUGBOX 11	LED	1350	D20
A	55	55	PLUGBOX 12	LED	1350	D20
A	56	56	PLUGBOX 13	LED	1350	D20
A	57	57	PLUGBOX 14	LED	1350	D20
A	58	58	PLUGBOX 15	LED	1350	D20
A	59	59	PLUGBOX 15	LED	1350	D20
A	60	60	PLUGBOX 16	LED	1350	D20
A	61	61	PLUGBOX 16	LED	1350	D20
A	62	62	PLUGBOX 17	LED	1350	D20
A	63	63	PLUGBOX 18	LED	1350	D20
A	64	64	PLUGBOX 2	LED	1350	D20
A	65	65	PLUGBOX 2	LED	1350	D20
A	66	66	PLUGBOX 4	LED	1350	D20
A	67	67	PLUGBOX 4	LED	1350	D20
A	68	68			1350	D20
A	69	69	LOBBY		1500	D20
A	70	70	STAGE WORK		1500	D20
A	71	71	CATWALK WORK		1500	D20
A	72	72	HOUSE LIGHTS		1500	D20
B	73	73	HOUSE LIGHTS		1500	D20
B	74	74	HOUSE LIGHTS		1500	D20
B	75	75	HOUSE LIGHTS		1500	D20
B	76	76	HOUSE LIGHTS		1500	D20
B	77	77	HOUSE LIGHTS		1500	D20
B	78	78				D20
B	79	79				AFM
B	80	80				AFM
B	81	81				AFM
B	82	82				AFM
B	83	83				AFM
B	84	84				AFM
B	85	85				AFM
B	86	86				AFM
B	87	87				AFM
B	88	88				AFM
B	89	89				AFM
B	90	90				AFM
	91	91				CC20
	92	92				CC20
	93	93	RUNNING LIGHTS (BLPS)			CC20
	94	94	BPS-1		1500	CC20
	95	95	BPS-2		1500	CC20
	96	96	LNCR		1500	CC20

3 DIMMING RACK SCHEDULE
NO SCALE

1

THEATRICAL LIGHTING JUNCTION BOX SCHEDULE

BOX #	LOCATION	SIZE	LEVEL	MOUNTING HEIGHT	MOUNTING TYPE	BOX & COVER PROVIDED BY	CONN. PLATE PROVIDED BY	NOTES
BD-1	VARIES	4 SQ SHALLOW		16" AFF	SURFACE	EC	TL	1, 2
BD-2	VARIES	1 GANG		CEILING	SURFACE	EC	TL	1, 2
BLPS	STAIR	10"X13.6"X3.4"	SECOND FLOOR	48" AFF	SURFACE	TL	TL	BLUE LIGHT POWER SUPPLY
BPS-1	CONTROL BOOTH N110	4 GANG DEEP	FIRST FLOOR	18" AFF	FLUSH	TL	TL	
BPS-2	NEW DIRECTORS BOOTH N201	4 GANG DEEP	SECOND FLOOR	18" AFF	FLUSH	TL	TL	
BPS-3	NEW VIDEO PLATFORM.	4 GANG DEEP	SECOND FLOOR	18" AFF	FLUSH	TL	TL	
BSD	CATWALK	4 SQ SHALLOW	CATWALK	42" AFF	SURFACE	EC	TL	1, 2
DMX-1	STAGE	1 GANG DEEP	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2
DMX-2	STAGE	1 GANG DEEP	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2
DMX-3	STAGE	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-4	STAGE	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-5	STAGE	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-6	STAGE	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-7	STAGE	1 GANG DEEP	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2
DMX-8	STAGE	1 GANG DEEP	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2
DMX-9	STAGE	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-10	STAGE	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-11	STAGE	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-12	STAGE	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-13	CATWALK	1 GANG DEEP	CATWALK	60" AFF	SURFACE	TL	TL	1, 2
DMX-14	CATWALK	1 GANG DEEP	CATWALK	60" AFF	SURFACE	TL	TL	1, 2
DMX-15	TORMENTOR	1 GANG DEEP	AUDITORIUM FLOOR	~16'-0" AFF	SURFACE	TL	TL	1, 2
DMX-16	AUDITORIUM	1 GANG DEEP	CATWALK	18" AFF	SURFACE	TL	TL	1, 2
DMX-17	CATWALK	1 GANG DEEP	CATWALK	60" AFF	SURFACE	TL	TL	1, 2
DMX-18	CATWALK	1 GANG DEEP	CATWALK	60" AFF	SURFACE	TL	TL	1, 2
DMX-19	TORMENTOR	1 GANG DEEP	AUDITORIUM FLOOR	~16'-0" AFF	SURFACE	TL	TL	1, 2
DMX-20	AUDITORIUM	1 GANG DEEP	CATWALK	18" AFF	SURFACE	TL	TL	1, 2
DMX-21	AUDITORIUM	1 GANG DEEP	CATWALK	CEILING	SURFACE	TL	TL	1, 2
DMX-22	CATWALK	1 GANG DEEP	CATWALK	24" AFF	SURFACE	TL	TL	1, 2
DMX-23	CATWALK	1 GANG DEEP	CATWALK	24" AFF	SURFACE	TL	TL	1, 2
DMX-24	STAGE	1 GANG DEEP	LOWER LEVEL	18" AFF	SURFACE	TL	TL	1, 2
DMX-25	STAGE	1 GANG DEEP	LOWER LEVEL	18" AFF	SURFACE	TL	TL	1, 2
DMX-26	MOVING LIGHT POSITION	1 GANG DEEP	LOWER LEVEL	~24'-0" AFF	SURFACE	TL	TL	1, 2
DMX-27	MOVING LIGHT POSITION	1 GANG DEEP	LOWER LEVEL	~24'-0" AFF	SURFACE	TL	TL	1, 2
DMX-28	PROSCENIUM	1 GANG DEEP	LOWER LEVEL	23'-0" AFF	FLUSH	TL	TL	1, 2
ES-X	VARIES	1 GANG DEEP		42" AFF	SURFACE	EC	TL	1, 2
LNCR	STAIR	24RU	SECOND FLOOR	24" AFF	WALL	TL	TL	1, 2
PB-1	STAGE	ETC 9101A	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2
PB-2	STAGE	ETC 9101A	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2
PB-3	STAGE	ETC 9101A	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2
PB-4	STAGE	ETC 9101A	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2
PB-5	TORMENTOR	ETC 9102A	AUDITORIUM FLOOR	~16'-0" AFF	SURFACE	TL	TL	1, 2
PB-6	AUDITORIUM	ETC 9101A	CATWALK	18" AFF	SURFACE	TL	TL	1, 2
PB-7	TORMENTOR	ETC 9102A	AUDITORIUM FLOOR	~16'-0" AFF	SURFACE	TL	TL	1, 2
PB-8	AUDITORIUM	ETC 9101A	CATWALK	18" AFF	SURFACE	TL	TL	1, 2
PB-9	CATWALK	ETC 9101A	CATWALK	24" AFF	SURFACE	TL	TL	1, 2
PB-10	CATWALK	ETC 9101A	CATWALK	24" AFF	SURFACE	TL	TL	1, 2
PB-11	CATWALK	ETC 9101A	CATWALK	24" AFF	SURFACE	TL	TL	1, 2
PB-12	CATWALK	ETC 9101A	CATWALK	24" AFF	SURFACE	TL	TL	1, 2
PB-13	STAGE	ETC 9101A	LOWER LEVEL	18" AFF	SURFACE	TL	TL	1, 2
PB-14	STAGE	ETC 9101A	LOWER LEVEL	18" AFF	SURFACE	TL	TL	1, 2
PB-15	MOVING LIGHT POSITION	ETC 9102A	LOWER LEVEL	~24'-0" AFF	SURFACE	TL	TL	1, 2
PB-16	MOVING LIGHT POSITION	ETC 9102A	LOWER LEVEL	~24'-0" AFF	SURFACE	TL	TL	1, 2
PB-17	PROSCENIUM	ETC 910A	CATWALK	23'-0" AFF	FLUSH	TL	TL	1, 2
PB-18	PROSCENIUM	ETC 9101A	CATWALK	23'-0" AFF	FLUSH	TL	TL	1, 2
SPS	STAGE	4 GANG DEEP	FIRST FLOOR	18" AFF	SURFACE	TL	TL	1, 2

NOTES:
1. ALL MOUNTING HEIGHTS ARE TO THE BOTTOM OF THE BOX.
2. SITE VERIFY MOUNTING LOCATIONS WITH LIGHTING CONSULTANT PRIOR TO INSTALLATION.

4 BOX SCHEDULE
NO SCALE

WAKELY ASSOCIATES, INC.
ARCHITECTS

30500 VAN DYKE AVENUE
SUITE M-7
WARREN, MICHIGAN 48093
PH: 586.573.4100
FX: 586.573.0822
www.wakelyaia.com

ACOUSTICS BY DESIGN
Consultants in Acoustics & AVL Systems Design
124 Fulton Street East, 2nd Floor
Grand Rapids, MI 49503
Portland, OR | Detroit, MI
(866) 372-9779
www.acousticsbydesign.com

FARMINGTON PUBLIC SCHOOLS - 2015 BOND
2017 RENOVATIONS
NORTH FARMINGTON HIGH SCHOOL

TL SCHEDULES AND NOTES

PRELIMINARY ☐
DESIGN DEVELOPMENT ☐
CONSTRUCTION ■
FINAL RECORD ☐

DRAWN BY: MT
CHECKED BY: TGH

REVISIONS:

05/11/17	100% CD
09/11/17	BIDS
09/29/17	ADDENDUM 1

DATE: AUGUST 11, 2017

SHEET NO.:
TL103

JOB NO.: 161664D